

Glass railings and exposed edges

Saflex® DG41 PVB provides new possibilities.



Architectural glass railings can dramatically enhance a building's facade, and for occupants, the unobstructed views are priceless. Exposed edges have long been a challenge for manufacturers and installers, but advancements in interlayer products have resolved many of these issues. Saflex DG41 polyvinyl butyral (PVB) interlayers are ideal for laminated glass railings, especially those in hot, humid climates. Laminated glass comprising these interlayers can withstand high humidity and temperature deviations between hot and cold climates without compromising the integrity of the laminate edge when properly laminated.


Exposed edges get the heat in Miami

Edge stability is a performance property that indicates Saflex interlayer's resistance to delamination when exposed edges are subjected to a hot and humid environment. For outdoor edge stability testing, Eastman selected a commercially operated site near one of the most tropical cities in the United States—Miami. Edge stability, as defined here, is a long-term event in which the samples are exposed to the natural outside environment. The edges are unprotected and, consequently, wet in the early morning (with dew) and during episodes of fog or rain.

The edge stability number (ESN) is a weighted sum of "percent defect lengths" where the weight increases as the square of the depth (expressed in sixteenths of an inch). The maximum ESN number is 2,500, with the minimum number being zero; the smaller the number, the better the edge stability in this environment. Any product exhibiting an ESN of less than 500 is considered exceptional.

Figure 1 shows the difference between the conventional Saflex PVB interlayer and a Saflex DG41 PVB interlayer both exposed at the aforementioned site for the corresponding duration. Understanding that an ESN of 500 is considered exceptional, Saflex DG41 performance at 58 months is outstanding. Saflex PVB interlayer formulation exposure was completed at 46 months; however, Saflex DG41 was exposed for a longer duration.

Figure 1. Edge stability numbers for Saflex® Clear and Saflex® DG41

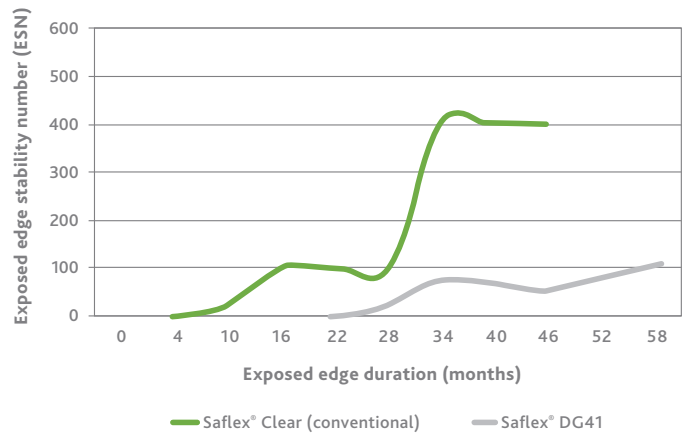

Salt fog testing for edge blush and delamination

Saflex DG41 PVB interlayer performed well in salt fog testing, which was conducted according to the ASTM B117-11 standard. Specimens were placed in a hot (35°C) environment and uniformly exposed to salt fog (created from a 5% saline solution). When compared against a Saflex Clear interlayer, Saflex DG41 showed marked improvement in performance in edge blush and was less susceptible to edge delamination.

Saflex® Structural product offering

Product nomenclature	Thickness	Std. widths	Std. lengths	Transparency
Saflex® DG	0.76 mm (0.030 in.)	45–322 cm	250 m	Clear

Sealant compatibility

Sealants can sometimes cause contact problems because of their various chemical compositions. Using GANA (Glass Association of North America) methodology, Eastman tested five different samples for 3,500 hours with cyclical UV light, heat, and condensation exposure. On average, Saflex DG41 PVB interlayer outperformed a standard interlayer on percentage of edge affected, average total depth, and maximum depth affected.

Post-breakage behavior

Laminated glass can provide protection following a rare breakage situation. The glass adheres to the interlayer, reducing the likelihood of shards of glass falling on pedestrians at the street level.

Adding color

Saflex DG41 PVB interlayer is compatible with Eastman's unlimited color possibilities via the Vanceva® Colors and Earth Tones collections. For distinctive color, subtle neutrals and whites, gradients, and patterns, Vanceva interlayer system offers unparalleled design options, giving architects the ability to make their projects unique.

Saflex DG41—unlimited design options

Saflex DG41 is the ideal interlayer solution for creating glass railings, balustrades, canopies, or other projects where exposed edges are involved. Extensive testing in both natural and lab conditions have shown that when properly laminated and installed, glass with Saflex and Vanceva formulations can provide acceptable long-term performance when edges of the laminate are exposed to normal weathering.

Additional benefits of Saflex laminated glass



Architects and designers trust Saflex®.

Around the world, architects and designers trust Saflex when performance and safety are their most critical concerns. The reason for their confidence is simple. No matter what the specifications or performance targets, Saflex interlayer technology delivers advanced glazing performance for demanding applications.



EASTMAN

The results of insight™

Eastman Corporate Headquarters

P.O. Box 431
Kingsport, TN 37662-5280 U.S.A.

U.S.A. and Canada, 800-EASTMAN (800-327-8626)
Other Locations, +(1) 423-229-2000

www.eastman.com/locations

Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company ("Eastman") and its subsidiaries make no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER'S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2019 Eastman. Eastman brands referenced herein are trademarks of Eastman or one of its subsidiaries or are being used under license. The ® symbol denotes registered trademark status in the U.S.; marks may also be registered internationally. Non-Eastman brands referenced herein are trademarks of their respective owners.