

Rapid channel Aluminium

Stylish & cost effective channel installation solution – simply position glass and grout in



Rapid channel




4200MM LONG

Mill finish aluminium

Order Code: **RAP-4200-CH-M**

Advantages


- Surface mount grout in system
- Mill finish aluminium can be easily powder coated to any colour finish
- Suits up to 19mm thick glass
- Pool fencing and balustrade compliant
Contact us for load test reports
- Drill fixing holes as required through bottom of Rapid channel
- Quick and easy to mitre cut for internal or external corners
- Glazing wedge rubbers conceal grout for neat finish
- End caps and infill available for a complete install solution

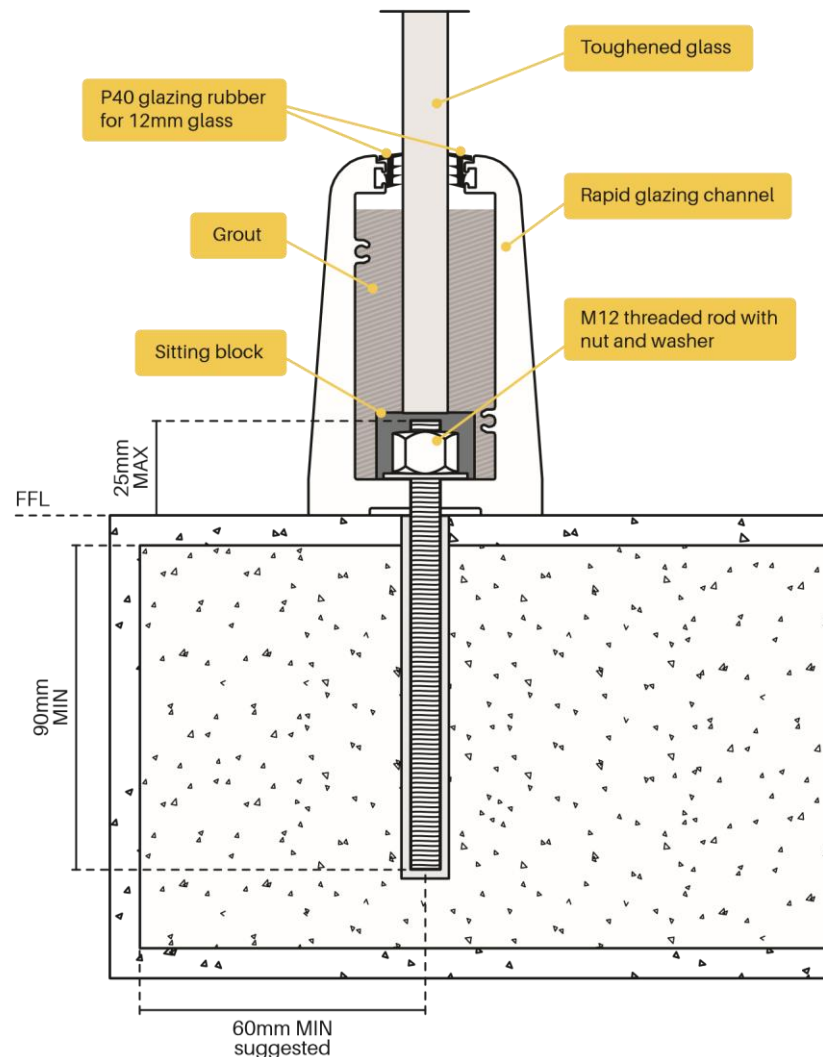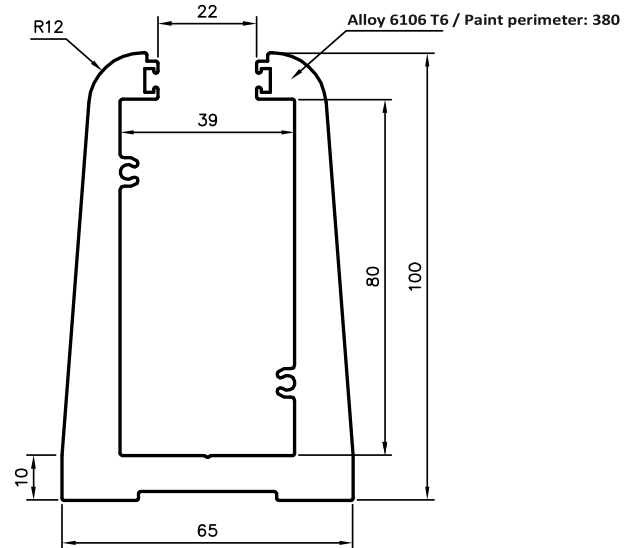

End plates

Order Code: **RAP-2EP-M**

- Mill finish aluminium
- Countersunk holes line up with screw flutes in channel
- 1x left & 1x right end plate included




Channel infill

Order Code: **RAP-4200-INF-M**

- Mill finish aluminium - 4200mm long
- Snap-in infill between glass panels

Rapid Channel Aluminium

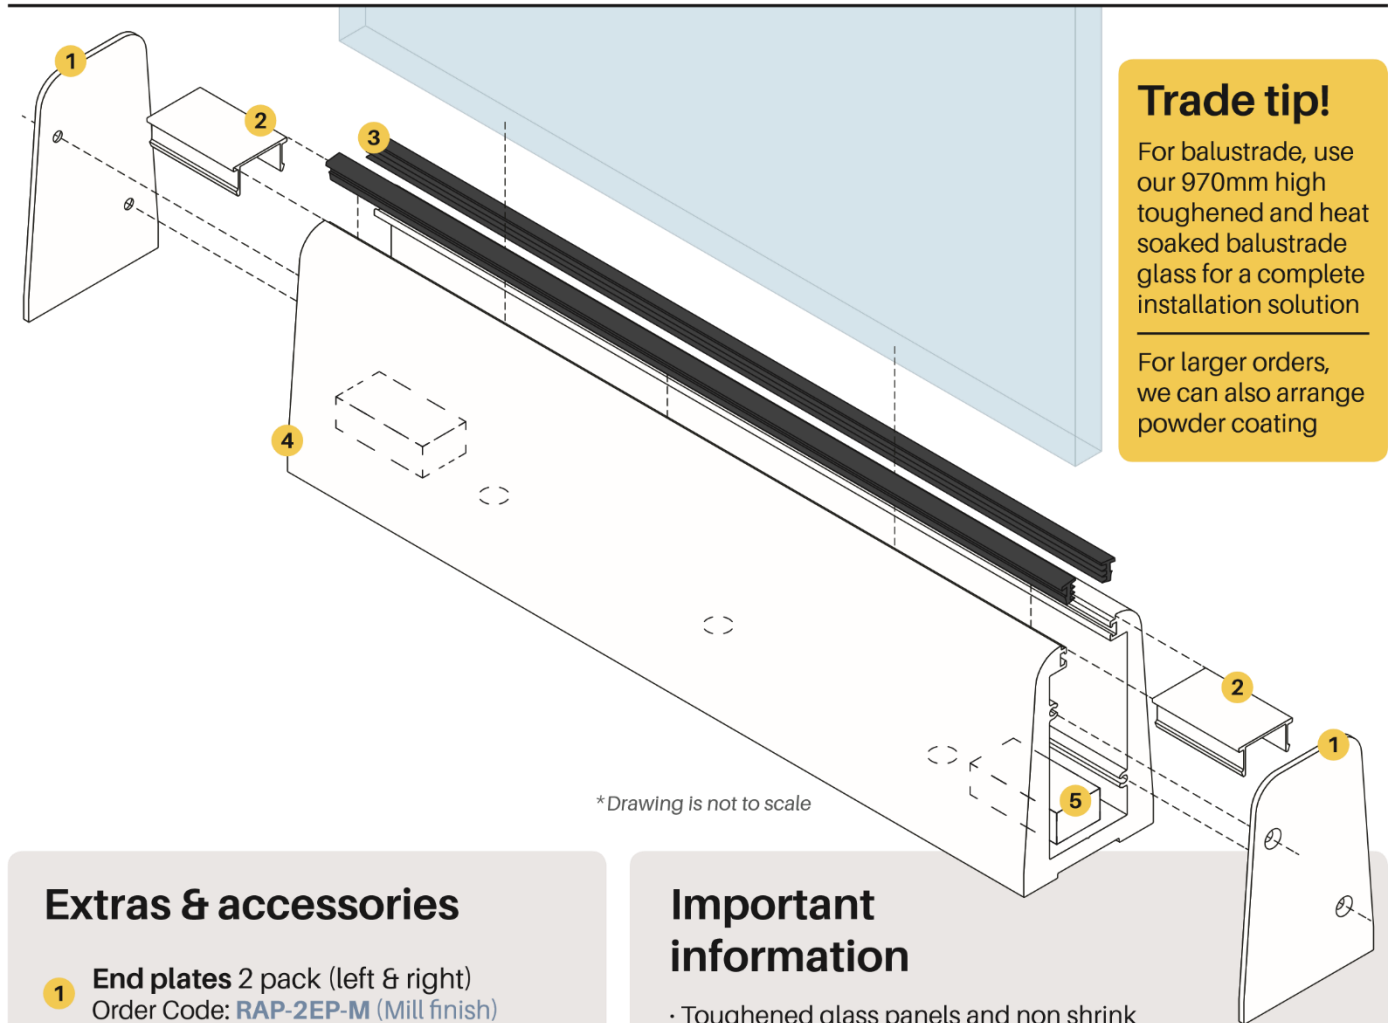

Trade tip!

For balustrade, use our 970mm high toughened and heat soaked balustrade glass for a complete installation solution

For larger orders, we can also arrange powder coating

Extras & accessories

- 1 **End plates 2 pack (left & right)**
Order Code: **RAP-2EP-M** (Mill finish)
- 2 **Channel infill 4200mm long**
Order Code: **RAP-4200-INF-M** (Mill finish)
- 3 **P40 glazing rubber**
Order Code: **A50-P40-ROLL**
- 4 **Rapid glazing channel**
Order Code: **RAP-4200-CH-M**
- 5 **Sitting block Plastic or rubber**
Not available from Glass Outlet, can be sourced from Clark Rubber or similar

Important information

- Toughened glass panels and non shrink structural grout should always be used when installing
- We suggest fixings with 400mm centres (each installation may be different, please check independent engineering)
- P40 glazing rubber pushes into both side of channel (P40 suits 12mm thick glass. Use suitable rubber for thicker glass)
- Sitting blocks must be high enough to ensure glass does not make contact with fixings
- End caps are affixed by screwing into channel screw flutes with countersunk screws (CSK screws not included)
- Snap-in infill can be used between glass panels. Easily cut infill to required lengths

Choose from any of our top glaze handrails to suit Rapid Channel & 12mm thick glass



Nanorail®
25x21mm
Square profile
SS316



Florida
25x34mm
Square profile
Aluminium




Griprail®
40x30mm
Square profile
SS316



Summit
54x30mm
Square profile
SS316



Nanorail®
Ø25.4mm
Round profile
SS316



Summit
Ø38mm
Round profile
SS316



Summit
Ø50.8mm
Round profile
SS316