


# INSTALLATION OPTIONS

Enjoy the flexibility of installing Xpress Plus patented side frames via 2 convenient methods

## METHOD 1

### BUILD AS YOU GO —


Pre-powder coated Xpress Plus side frames are affixed to a wall or pillar. Slats are then inserted from the bottom working upwards to completion. Slats are separated by snap in spacers.

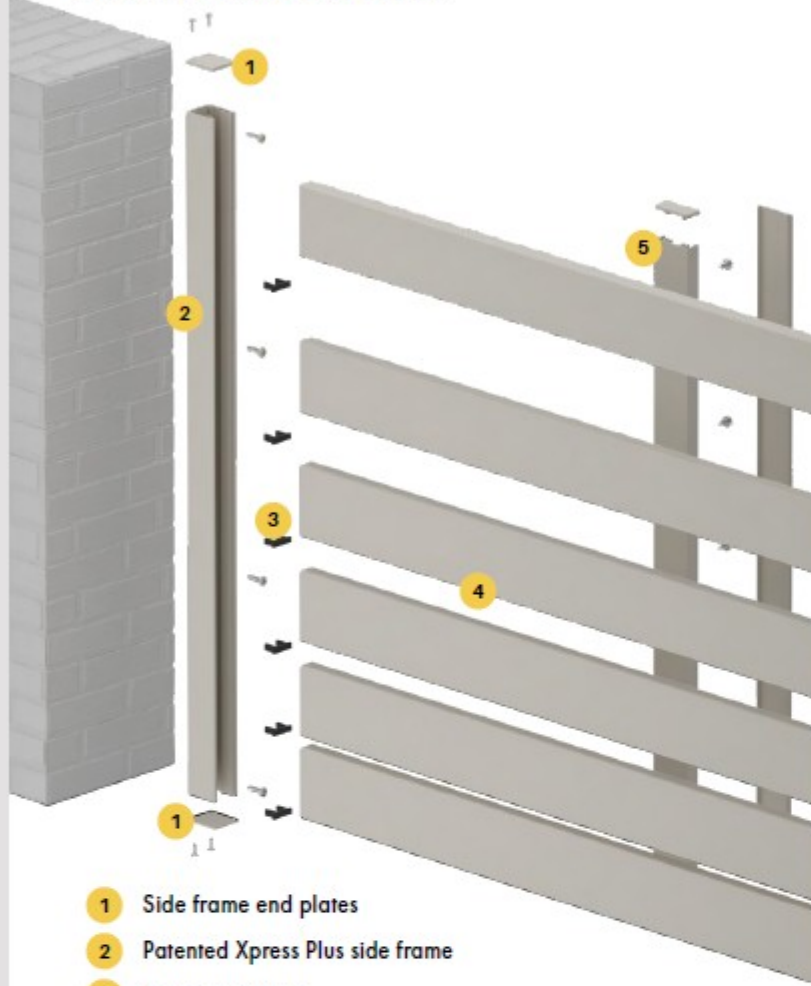

- 1 Side frame end plates
- 2 Patented Xpress Plus side frame
- 3 Snap-in spacers
- 4 65mm x 16.5mm slats (90mm x 16.5mm slats also available)
- 5 Centre support rail (Recommended for use on screens over 2000mm wide)

### BENEFITS & FEATURES —


- Assemble on-site with pre-powder coated material - quick and easy!
- No welding, riveting or screwing off slats required
- No need for U channel or F section - Side frames affix directly to wall or post
- Patented side frames overcome out of square wall/posts: Friction fitting of slats into side frame allows slats to laterally adjust if needed
- Side frame suits 65mm x 16.5mm or 90mm x 16.5mm slats
- Variable slat spacing: Spacers for 5mm, 9mm or 20mm are available or easily achieve unique spacing by cutting to size from 100mm spacer blocks.
- For privacy/nil spacing, simply stack slats on top of each other

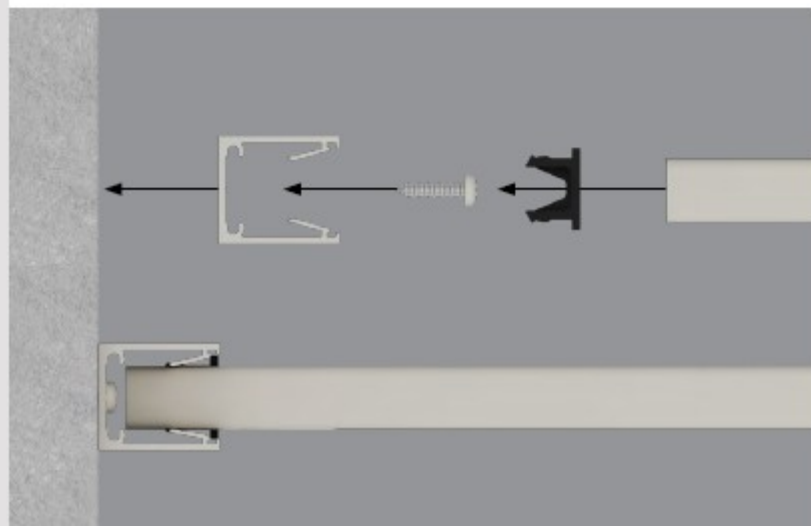

## METHOD 2

### PRE-ASSEMBLE PANELS —


Screen panels are assembled at a workshop or onsite. Slats are separated by snap in spacers OR via premium aluminium insert. Fully assembled panel is installed to wall/post with U channel or F section.

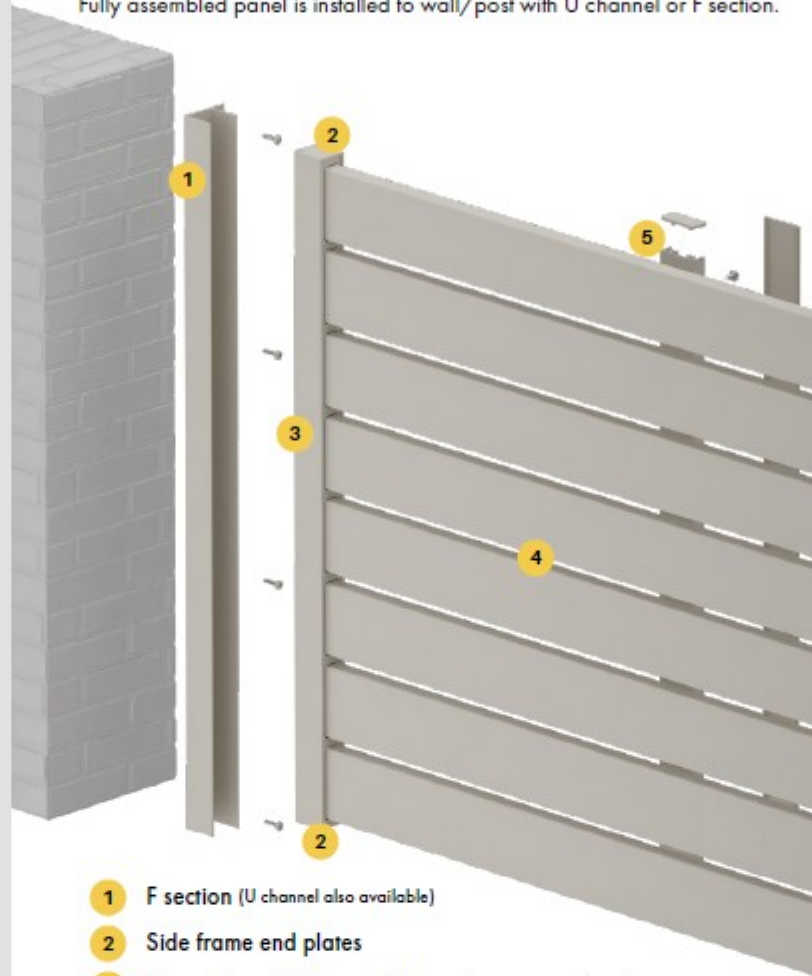

- 1 F section (U channel also available)
- 2 Side frame end plates
- 3 Xpress Plus side frame with premium spacer insert
- 4 65mm x 16.5mm slats (90mm x 16.5mm slats also available)
- 5 Centre support rail (Recommended for use on screens over 2000mm wide)

### BENEFITS & FEATURES —

- Pre-assemble panels in workshop or onsite prior to actual install
- Install with U channel or F section - Overcome out of square walls/posts with forgiveness in U channel or F section cavity
- No welding, riveting or screwing off slats required
- Create gaps between slats using snap in spacers OR premium aluminium insert
- Premium insert suits 65x16.5mm slat only with 9 or 20mm slat pacing
- Snap in spacers of 5mm, 9mm or 20mm available or create your own unique spacer
- For privacy/nil spacing, simply stack slats on top of each other
- Use of premium aluminium insert spacer enables assembly of mill finish panels which may be powder coated as a completed unit
- Side frame suits 65mm x 16.5mm or 90mm x 16.5mm slats

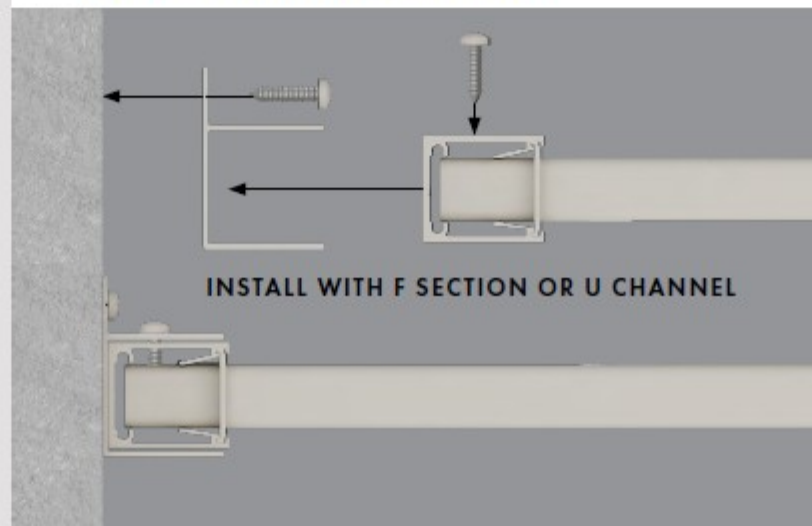

INSTALL WITH F SECTION OR U CHANNEL